




- Speed 25 to 60 ppm
- Bottom overlap seal
- Quick size changeover
- Simple design unique to Autopack



Parameter	Machine Model				
			50SIMH25	70SIMH35	
Film	Max Roll Width	mm	500	700	
	Max Roll Dia	mm	400	400	
	Max film thickness	um	100	100	
Max pack size	Height	mm	250	350	
	Width	mm	400	600	
Individual product size	Min dia	For Cylindrical product	40	55	
	Min width	For oblong / Oval product	20	25	
	Min depth		mm	40	55
Packing speed	Small packs	For example 6pk Coffee can	ppm	45-60	40-50
	Large packs	6pack of 1.5l Bottles	ppm	25-35	23-40
Electrical supply	380/415V 3ph 50Hz	Max phase current	A	28	35
	220V 3 phase 60 Hz	Max A/ph	A	48	60
		Average power usage	kW	15	20
Compress Air	500kPa/5 Bar	NL/Cycle		0.7	0.8
	75PSI	CFM		0.02	0.023
Machine Dimensions	System Length	Ls	mm	5000	5000
	System Width	Ws	mm	800	1000
	System Height	Hs	mm	700	700
	Wrapping Unit	Lw	mm	2000	2000
	Tunnel Length	Lt	mm	3000	3000
	Infeed conveyor	Li	mm	500+	500+
	Discharge conveyor	Lo	mm	1500+	1500+

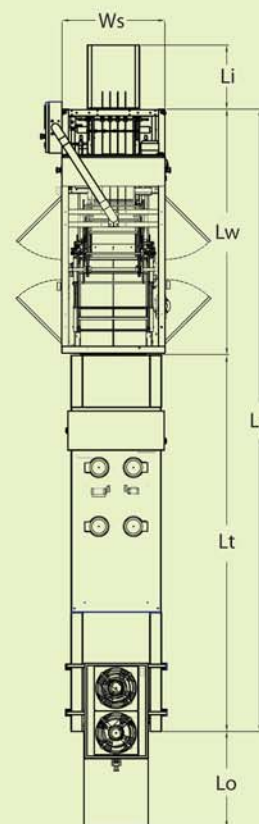

Note! The above details should be used as guide line only and confirmed with Autopack, as each delivered machine parameters will depend on customer and product specification.

Our Distributors

Manufactured By:
Autopack Co., Ltd.
98/50 Moo 11 Phuthamonthon Sai 5 Rd,
Raikhing Sampran, Nakornpathom
73210, Thailand.
Tel: (66) 2 8118340, Fax: (66) 2 8118341
sales-inter@autopack.com.au

Australia
Tel: +61 2 96957084
salesau@autopack.com.au

China
Tel: +86 21 5048 4088
matthieu.jouan@cermex.fr

Denmark
Tel: +45 45 99 79 80
ca@phpacs.com

India
Tel: +91 22 67057777
sales.pam@acg-world.com

Malaysia
Tel: +603 56328803
jimmiho@senjin.com

Mexico
Tel: +52 55 56331487
jorge_moreno@tecnopak.com.mx

Poland
Tel: +48 17 85608 77
as@autopack.com.au

Singapore
Tel: +65 6482 3575
cecil@tantraco.com.sg

Sweden
Tel: +45 45 99 79 80
ca@phpacs.com

Vietnam
Tel: +84 8 9311205-7
chatchai.patamatamkul@neounicap.com

USA
Tel: +860 2328449
peterd@globaliancepkg.com